


6 - PROGRAMMING TRANSMITTER AND RECEIVER

Procedure


- 1) Press and hold the push-button P1 for 4 sec. until the green led LD comes ON (Fig. 4); the led display the current operating mode according to par. 4.
- 2) Press the transmitter button down : LD switches OFF and ON again, waiting for another tx to memorize;
- 3) If within 10 sec. no more transmitters are activated, LD switches OFF and the procedure is over.

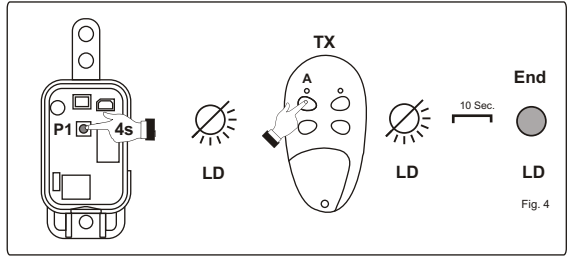

7 - MEMORY FULL

If the memory is full when you try to memorize one more transmitter LD flashes 3 times and the procedure ends.

8 - ERASING TRANSMITTERS FROM THE MEMORY

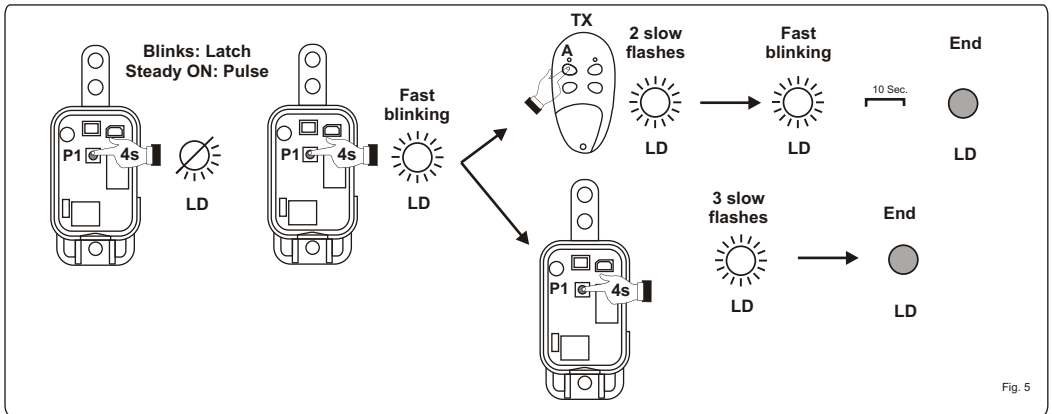

Procedure

- 1) Press and hold the push-button P1 for 4 sec. until the green led LD comes ON (Fig. 5); the led display the current operating mode according to par. 4.
- 2) Press and hold P1 for more 4 sec. : LD begins to blink fast.
At this point you can do 2 different operations:

A) DELETE THE SINGLE TRANSMITTER

Press the button down of the transmitter to delete. LD flashes twice slow and then begins again to blink fast for more tx to delete. If within 10 sec. no more transmitters are activated, LD switches OFF and the procedure is over.

B) ERASE ALL THE MEMORY

Press and hold P1 for more 4 sec. : LD makes 3 slow flashes then switches off and the procedure ends.

WARRANTY

USAutomatic, LTD warrants this product to be free of defects in materials and workmanship for 1 YEAR. For a period of 1 YEAR following purchase USAutomatic, LTD. will repair or replace the product free of charge, including parts, shop labor and return shipping and handling.

This 1 YEAR warranty does not cover the plastic case from normal wear or damage due to misuse of the receiver or transformer. Modifications to the supplied transformer will void the warranty.

To have the product sent for warranty consideration, it must be returned with the proof of purchase and a return authorization number. To obtain a return authorization number please visit www.usautomatic.com or call 1-888-204-0174 for assistance.

The return authorization number must be clearly marked on the outside of the return package or it may not be accepted.

(800) 878-7829

www.USAutomaticGateOpeners.com

